


Canary Wharf

www.deverevenues.co.uk

0845 136 0123



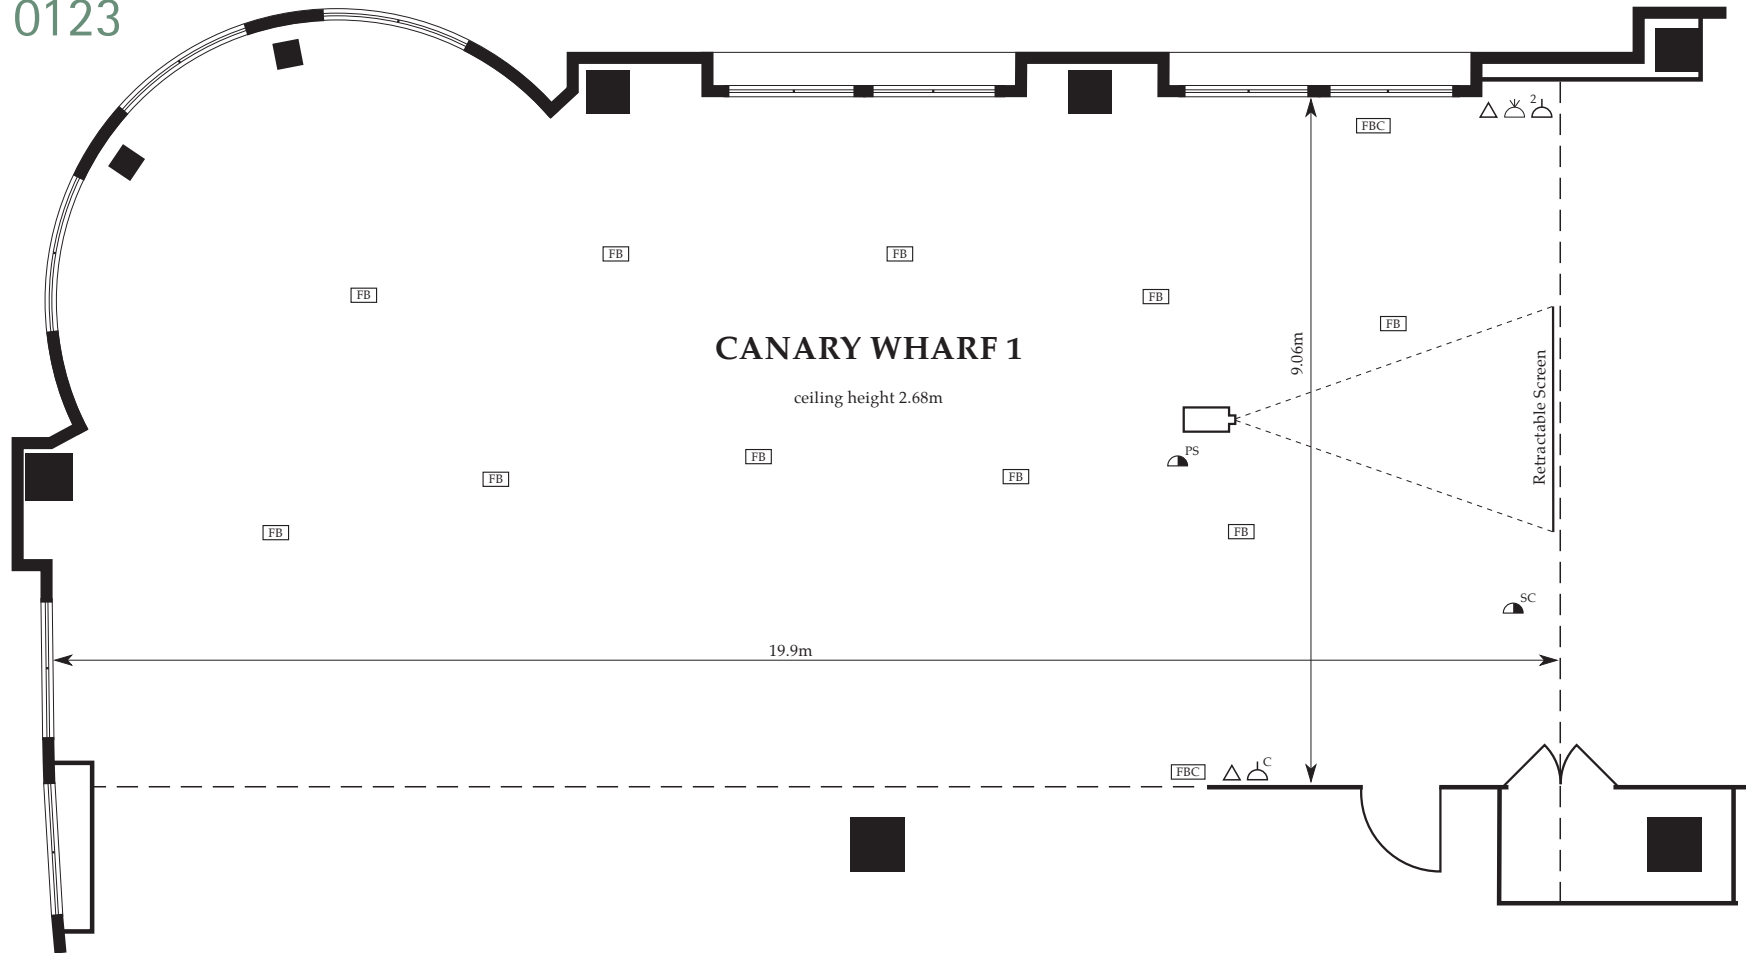











CANARY WHARF 1

ceiling height 2.68m

19.9m

9.06m

Retractable Screen

- | | | | |
|---|--|---|---|
|  | Distribution board |  | Spur for projector screen (above ceiling) |
|  | 3 Compartment floor box |  | Unswitched 13A fused spur |
| | 4 No Socket outlets |  | Spur for illuminated signage |
| | 4 No Data outlets |  | 20mm conduit containment from floor void.
Height to be announced |
|  | Floor box for credenza. Wireways
to the projector screens shall be installed. |  | Twin 13A socket outlet |
|  | Twin 13A socket outlet |  | TV aerial point |
|  | Cleaners socket |  | 3 compartment dado trunking |

NOTES

- Final positions of credenza to be confirmed by DeVere.
- Comment from voice data and AV specialist needs to be made on outlet positions and containment.
- Coffee points are shown as 13A outlets.