










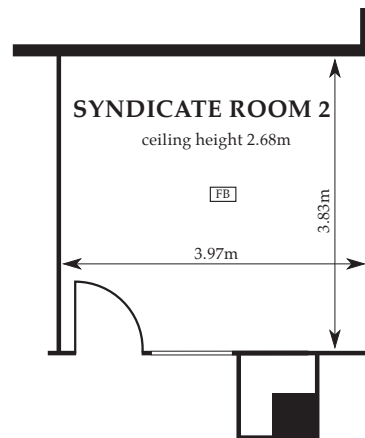




# Canary Wharf

www.deverevenues.co.uk

0845 136 0123



-  Distribution board
-  3 Compartment floor box
-  4 No Socket outlets
-  4 No Data outlets
-  Floor box for credenza. Wireways to the projector screens shall be installed.
-  Twin 13A socket outlet
-  Cleaners socket
-  Spur for projector screen (above ceiling)
-  Unswitched 13A fused spur
-  Spur for illuminated signage
-  20mm conduit containment from floor void. Height to be announced
-  TV aerial point
-  3 compartment dado trunking

## NOTES

1. Final positions of credenza to be confirmed by DeVere.
2. Comment from voice data and AV specialist needs to be made on outlet positions and containment.
3. Coffee points are shown as 13A outlets.